300 m MOA Ladder / OCW

Numbered true-MOA aiming points for 300 m ladder and OCW workups.

TRUE MOA TARGET

300 m / print at 100%

PRINT VALIDATION

0.5 MOA @ 300 m = 43.63 mm



0.25 MOA = 21.82 mm



Measure with a ruler: each bar must match its length.

Rifle	Load	Start / Step	Date

Velocity	Seating depth	Conditions	Notes

Rings 0.5 / 1.0 MOA, diamond 0.5 MOA tall, box 0.25 MOA (sizes at the centre of each line) · aim at the centre.

1

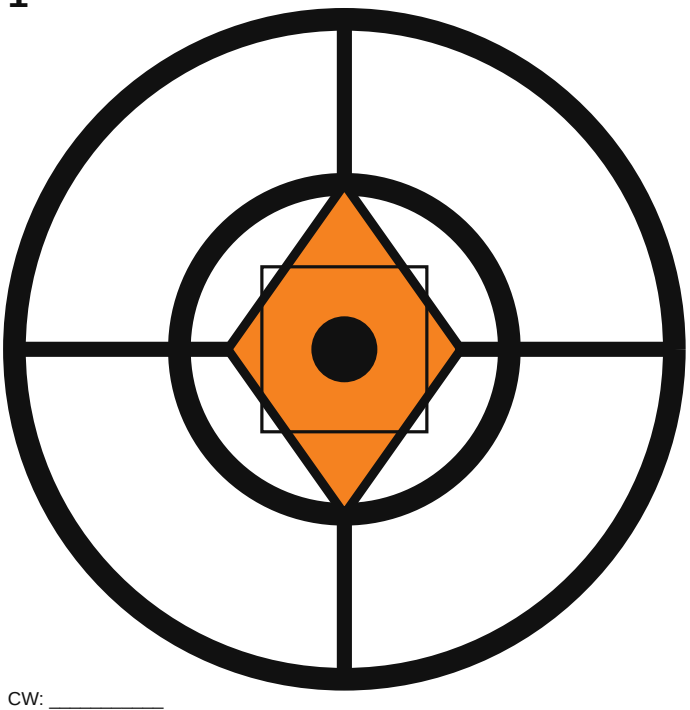

CW: _____
COL:_____

2



CW: _____
COL:_____

3

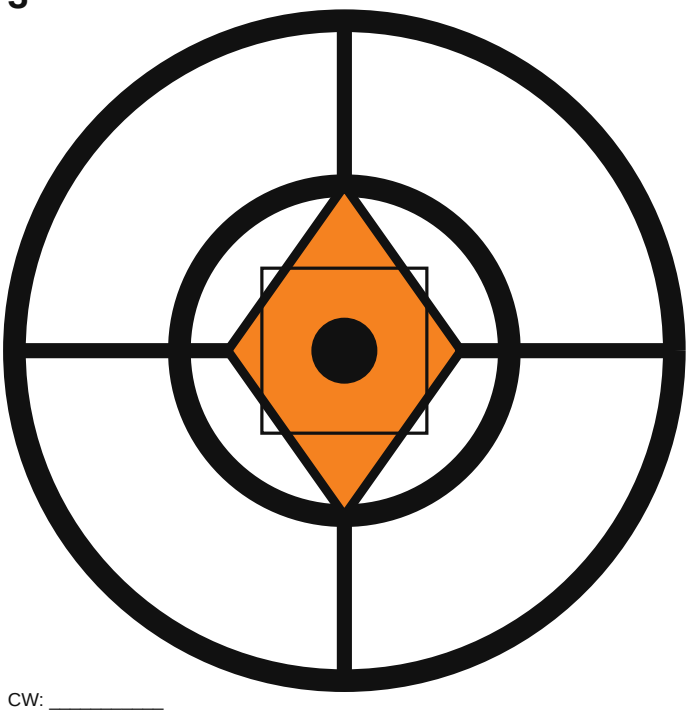

CW: _____
COL:_____

4

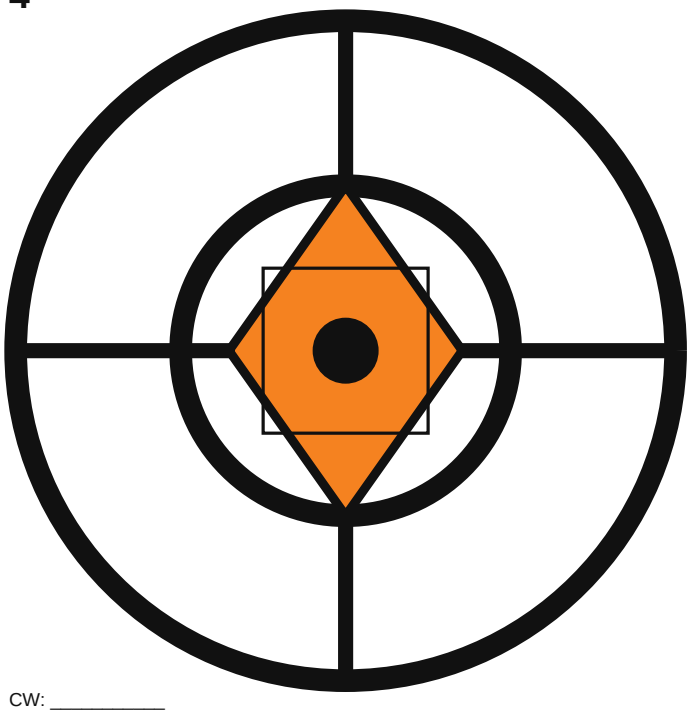

CW: _____
COL:_____

300 m MOA Ladder / OCW

Numbered true-MOA aiming points for 300 m ladder and OCW workups.

TRUE MOA TARGET

300 m / print at 100%

PRINT VALIDATION

0.5 MOA @ 300 m = 43.63 mm



0.25 MOA = 21.82 mm



Measure with a ruler: each bar must match its length.

Rifle	Load	Start / Step	Date

Velocity	Seating depth	Conditions	Notes

Rings 0.5 / 1.0 MOA, diamond 0.5 MOA tall, box 0.25 MOA (sizes at the centre of each line) · aim at the centre.

5

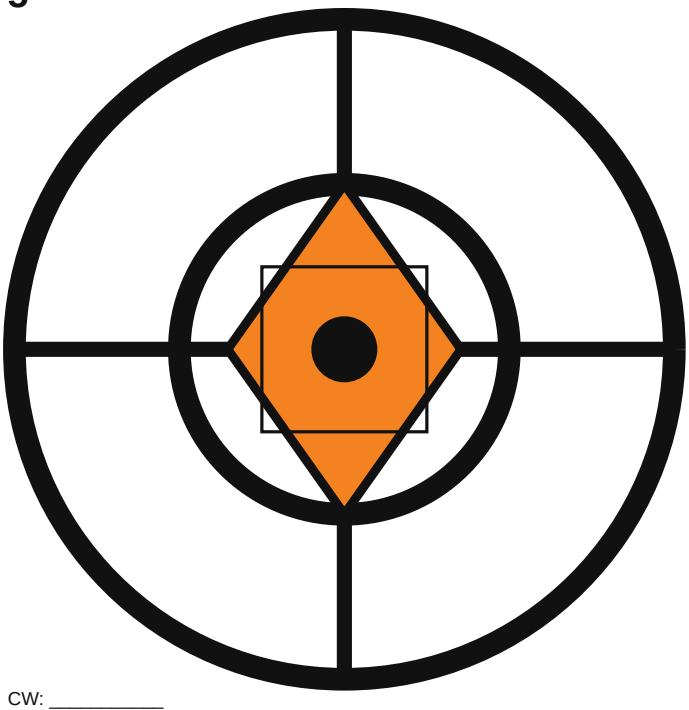

CW: _____
COL:_____

6



CW: _____
COL:_____

7

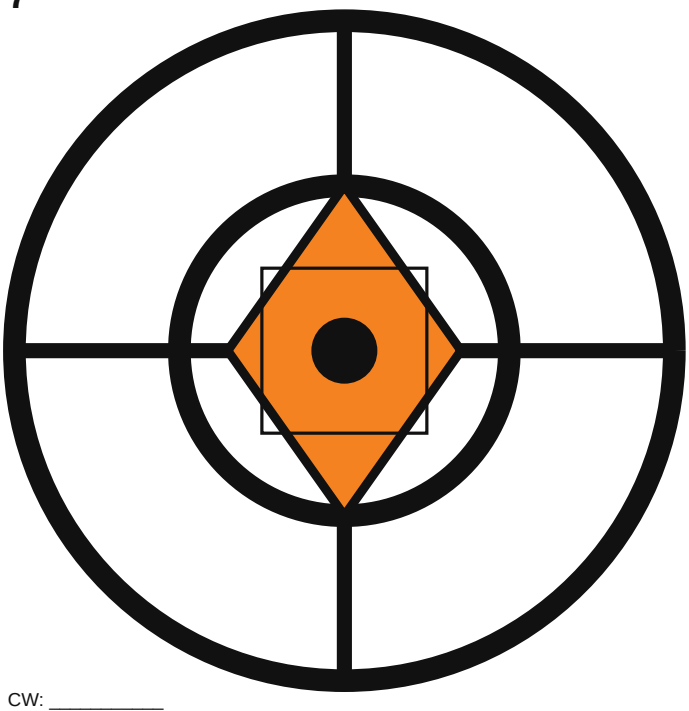

CW: _____
COL:_____

8

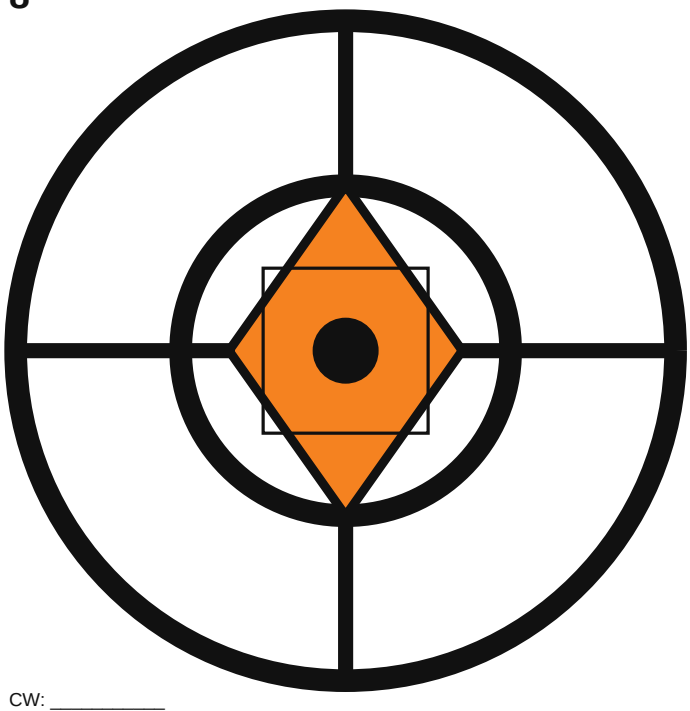

CW: _____
COL:_____

300 m MOA Ladder / OCW

Numbered true-MOA aiming points for 300 m ladder and OCW workups.

TRUE MOA TARGET

300 m / print at 100%

PRINT VALIDATION

0.5 MOA @ 300 m = 43.63 mm



0.25 MOA = 21.82 mm



Measure with a ruler: each bar must match its length.

Rifle	Load	Start / Step	Date

Velocity	Seating depth	Conditions	Notes

Rings 0.5 / 1.0 MOA, diamond 0.5 MOA tall, box 0.25 MOA (sizes at the centre of each line) · aim at the centre.

9

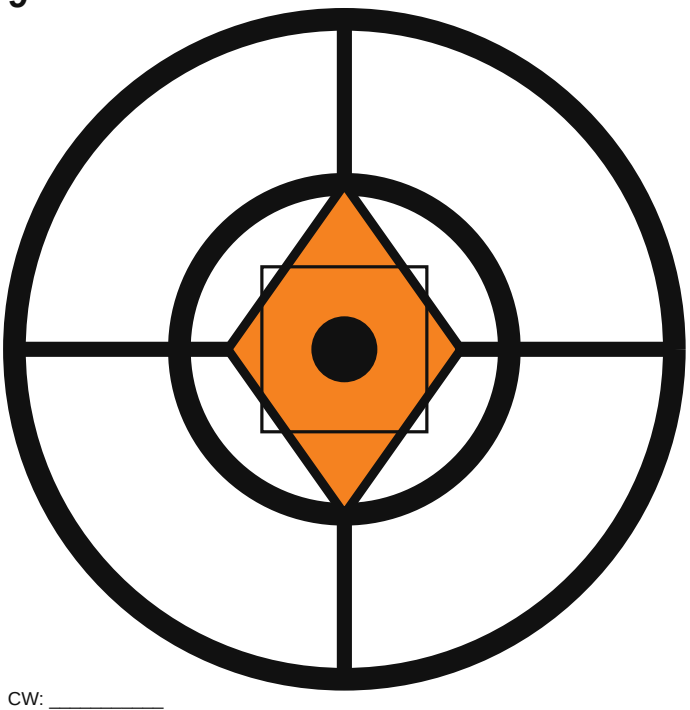

CW: _____
COL:_____

10



CW: _____
COL:_____

11

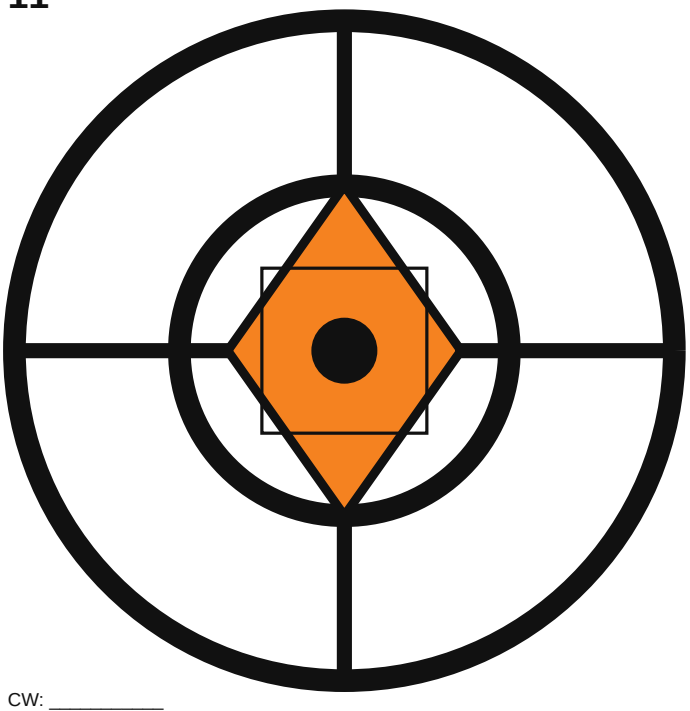

CW: _____
COL:_____

12

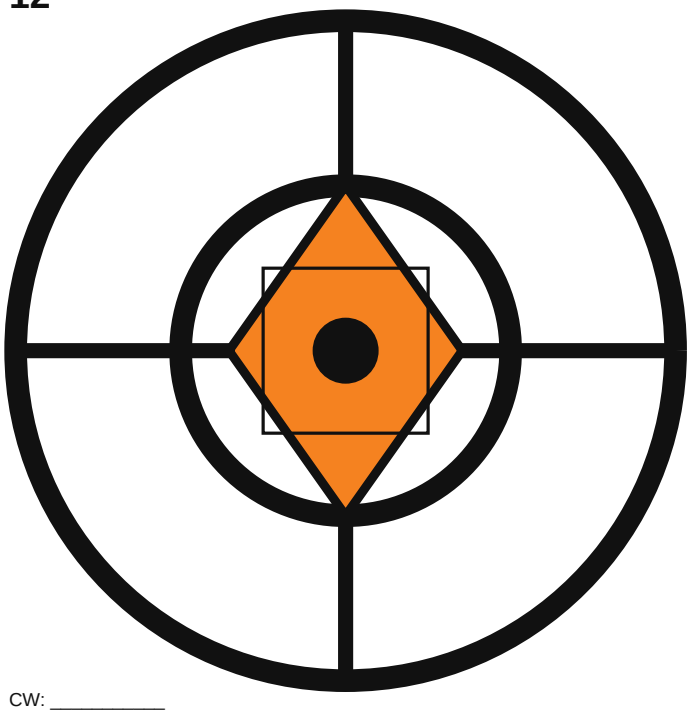

CW: _____
COL:_____