600 yd MOA Ladder / OCW

Numbered true-MOA aiming points, one per page.

TRUE MOA TARGET

600 yd / print at 100%

PRINT VALIDATION

0.5 MOA @ 600 yd = 79.80 mm

0.25 MOA = 39.90 mm



Measure with a ruler: each bar must match its length.

Rifle	Load	Start / Step	Date

Velocity	Seating depth	Conditions	Notes

Rings 0.5 / 1 MOA (79.80 / 159.59 mm), crosshair 1 MOA, diamond 0.5 MOA tall, box 0.25 MOA · aim at the centre.

1

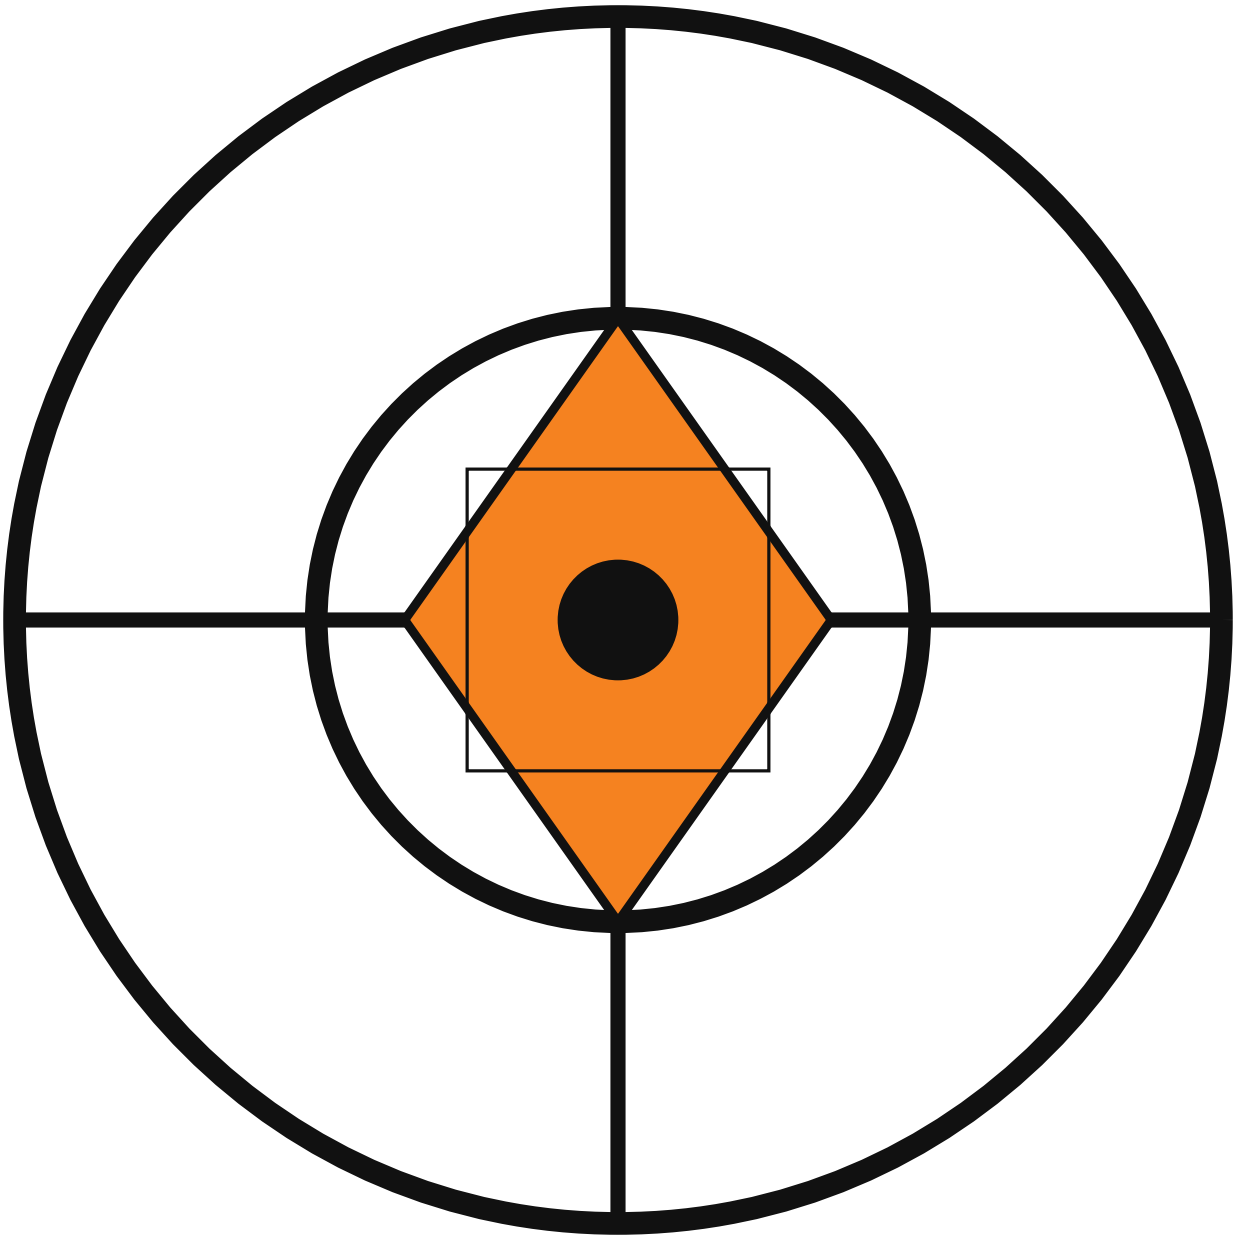

CW: _____

COL: _____

600 yd MOA Ladder / OCW

Numbered true-MOA aiming points, one per page.

TRUE MOA TARGET

600 yd / print at 100%

PRINT VALIDATION

0.5 MOA @ 600 yd = 79.80 mm

0.25 MOA = 39.90 mm

Measure with a ruler: each bar must match its length.

Rifle	Load	Start / Step	Date

Velocity	Seating depth	Conditions	Notes

Rings 0.5 / 1 MOA (79.80 / 159.59 mm), crosshair 1 MOA, diamond 0.5 MOA tall, box 0.25 MOA · aim at the centre.

2

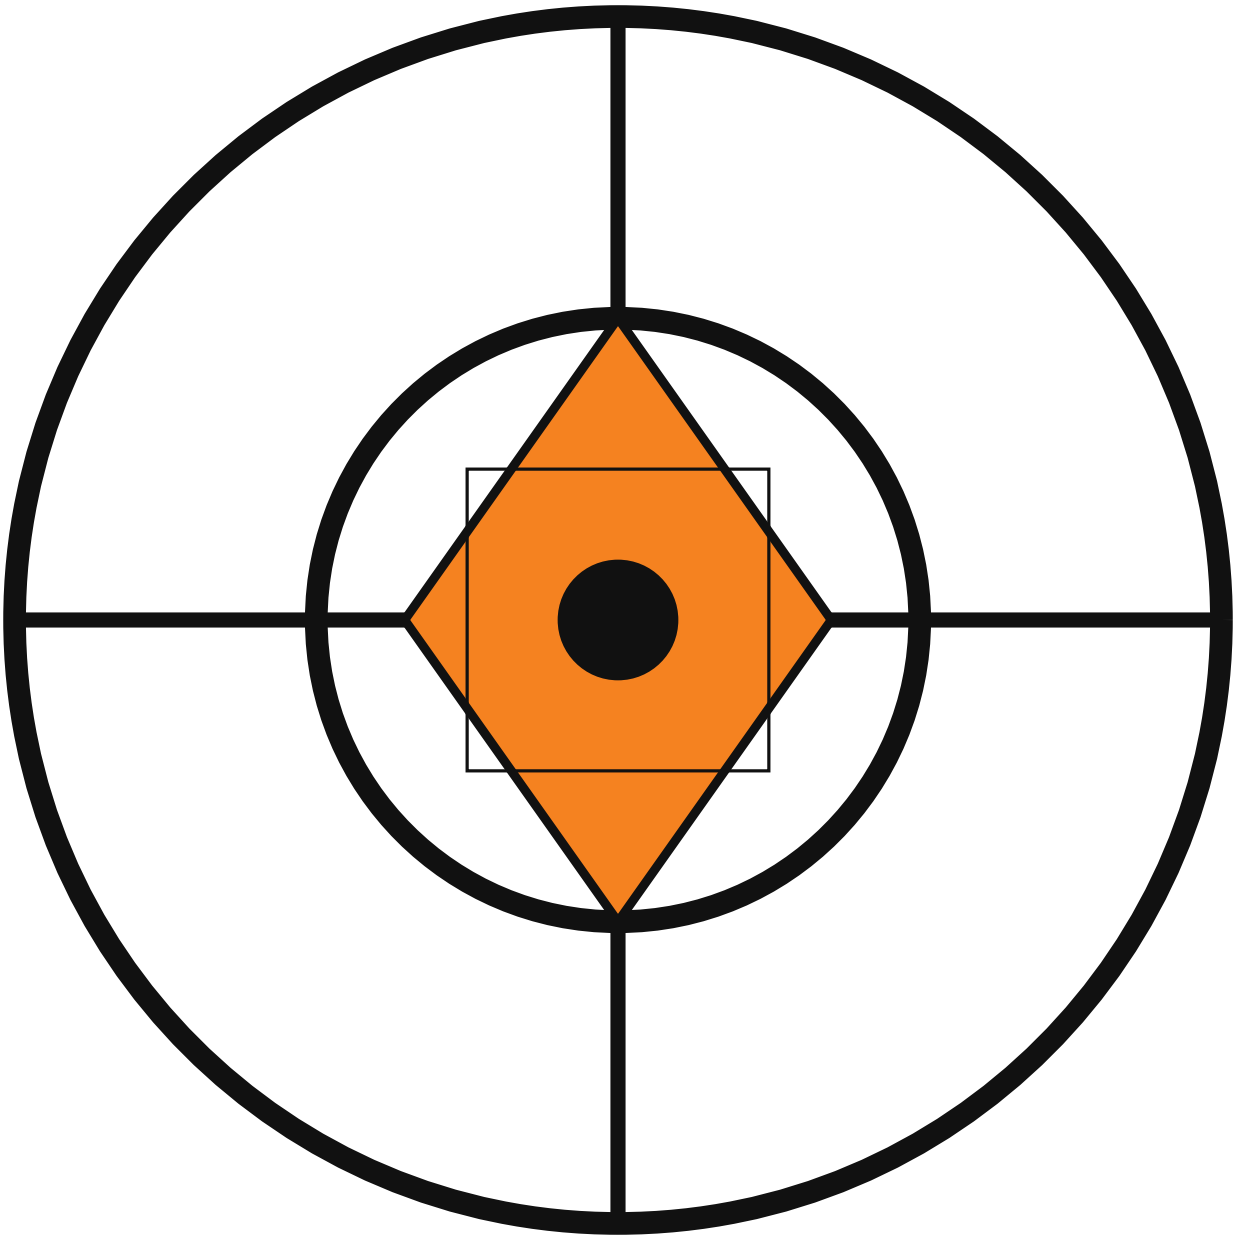

CW: _____

COL: _____

600 yd MOA Ladder / OCW

Numbered true-MOA aiming points, one per page.

TRUE MOA TARGET

600 yd / print at 100%

PRINT VALIDATION

0.5 MOA @ 600 yd = 79.80 mm

0.25 MOA = 39.90 mm

Measure with a ruler: each bar must match its length.

Rifle	Load	Start / Step	Date

Velocity	Seating depth	Conditions	Notes

Rings 0.5 / 1 MOA (79.80 / 159.59 mm), crosshair 1 MOA, diamond 0.5 MOA tall, box 0.25 MOA · aim at the centre.

3

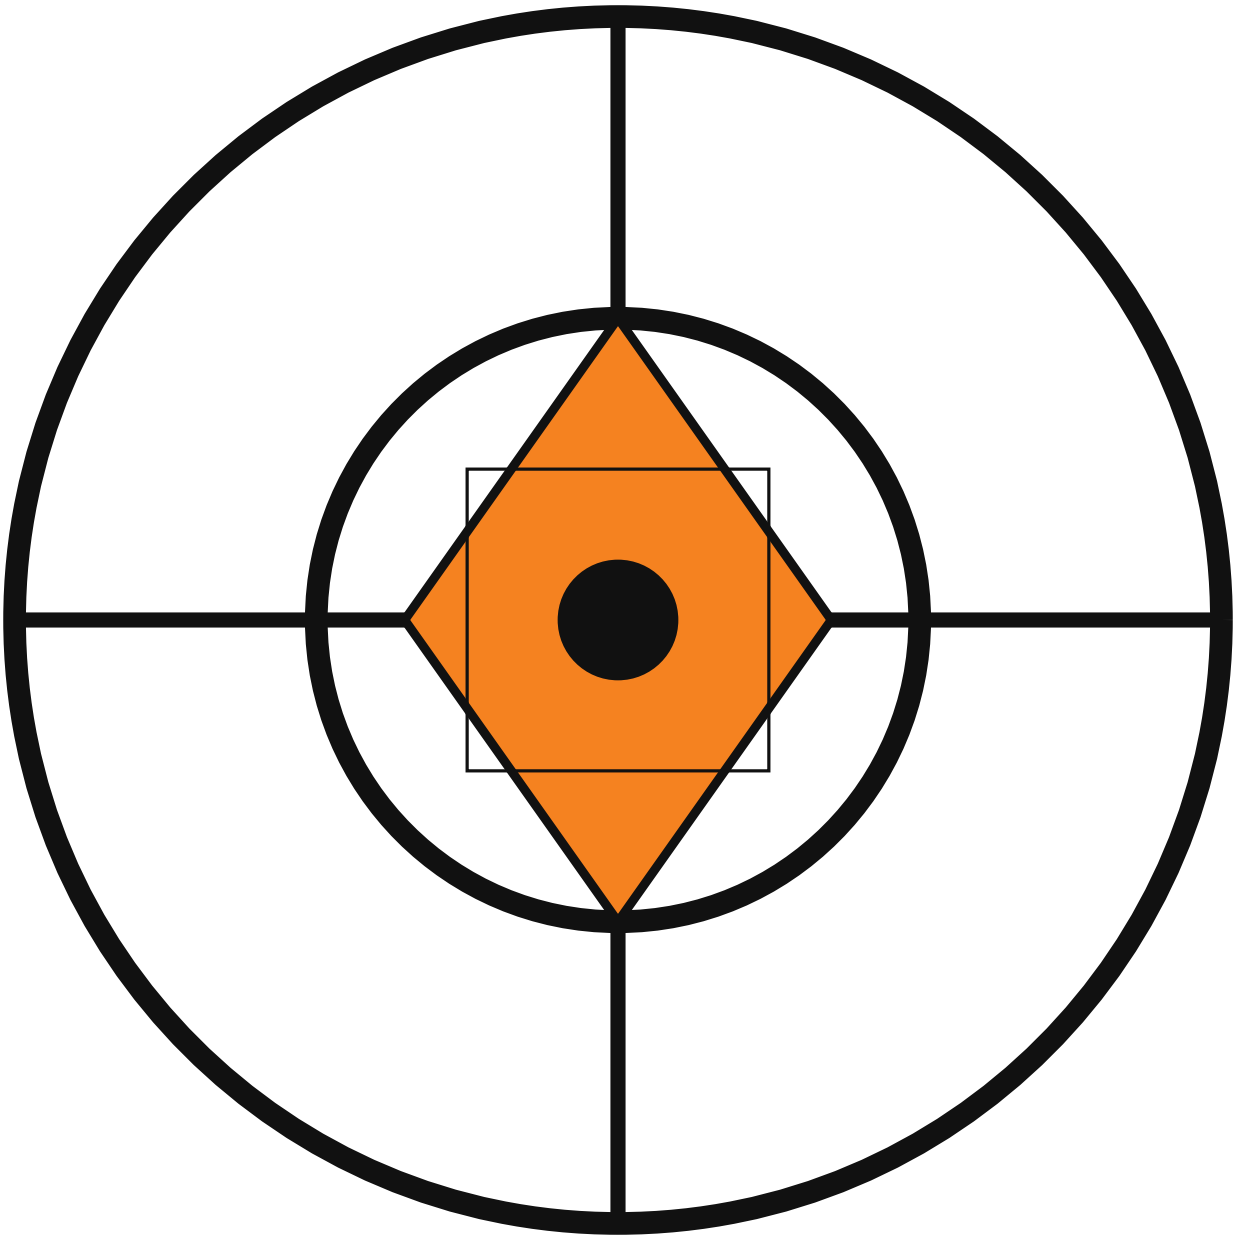

CW: _____

COL: _____

600 yd MOA Ladder / OCW

Numbered true-MOA aiming points, one per page.

TRUE MOA TARGET

600 yd / print at 100%

PRINT VALIDATION

0.5 MOA @ 600 yd = 79.80 mm

0.25 MOA = 39.90 mm

Measure with a ruler: each bar must match its length.

Rifle	Load	Start / Step	Date

Velocity	Seating depth	Conditions	Notes

Rings 0.5 / 1 MOA (79.80 / 159.59 mm), crosshair 1 MOA, diamond 0.5 MOA tall, box 0.25 MOA · aim at the centre.

4

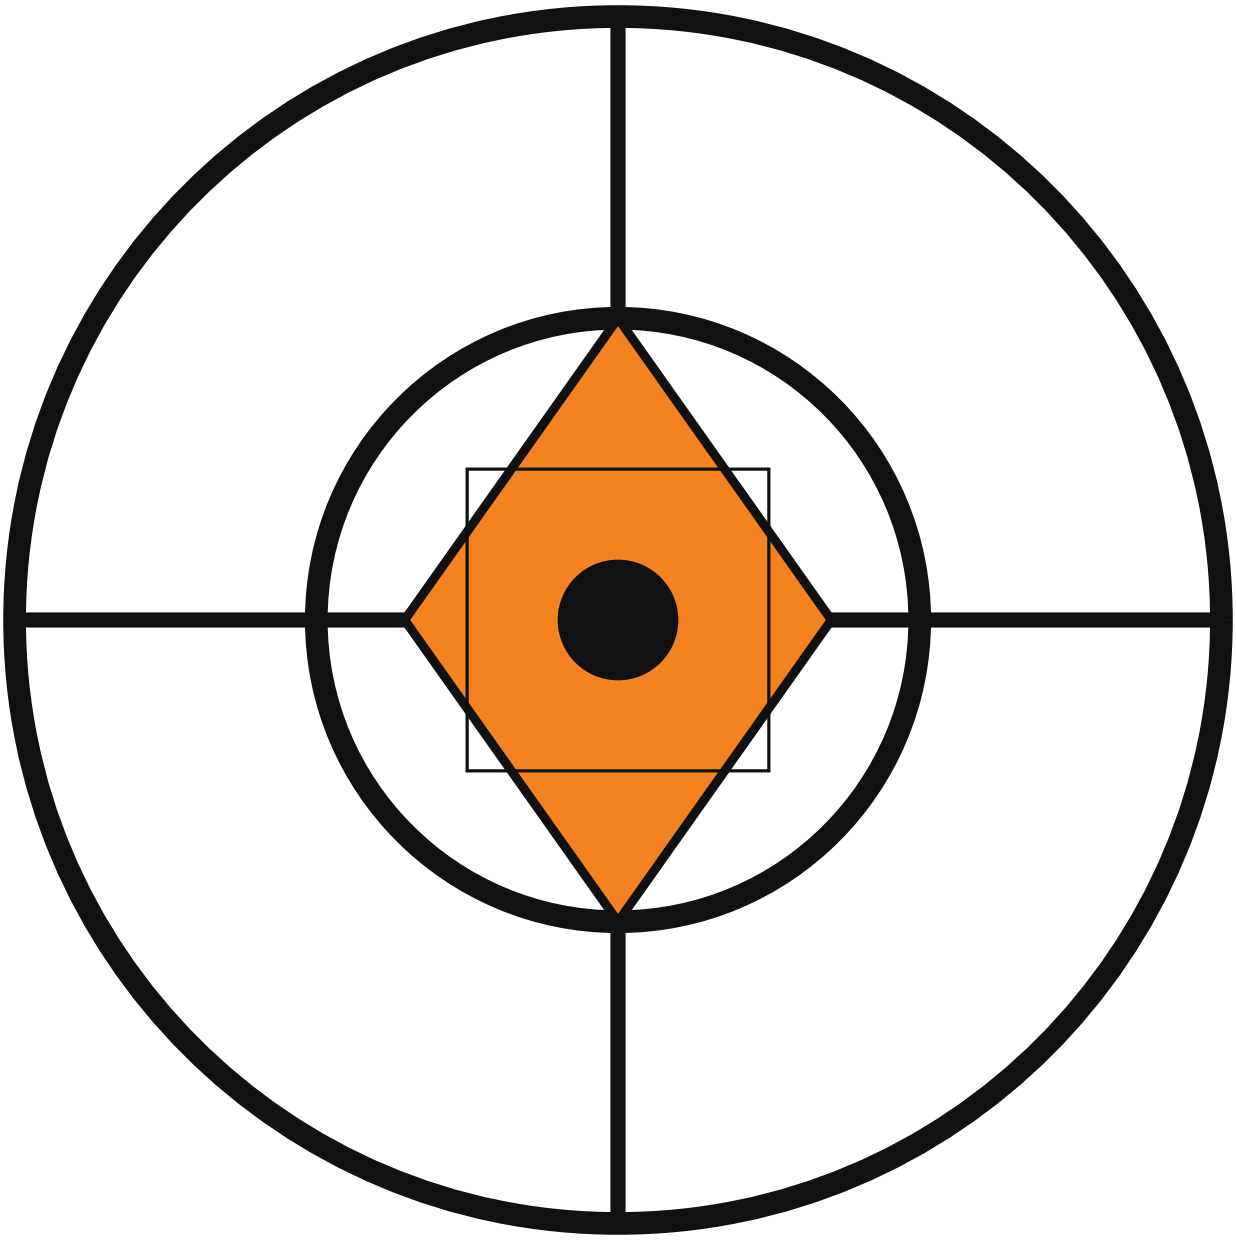

CW: _____

COL: _____

600 yd MOA Ladder / OCW

Numbered true-MOA aiming points, one per page.

TRUE MOA TARGET

600 yd / print at 100%

PRINT VALIDATION

0.5 MOA @ 600 yd = 79.80 mm



0.25 MOA = 39.90 mm



Measure with a ruler: each bar must match its length.

Rifle	Load	Start / Step	Date

Velocity	Seating depth	Conditions	Notes

Rings 0.5 / 1 MOA (79.80 / 159.59 mm), crosshair 1 MOA, diamond 0.5 MOA tall, box 0.25 MOA · aim at the centre.

5

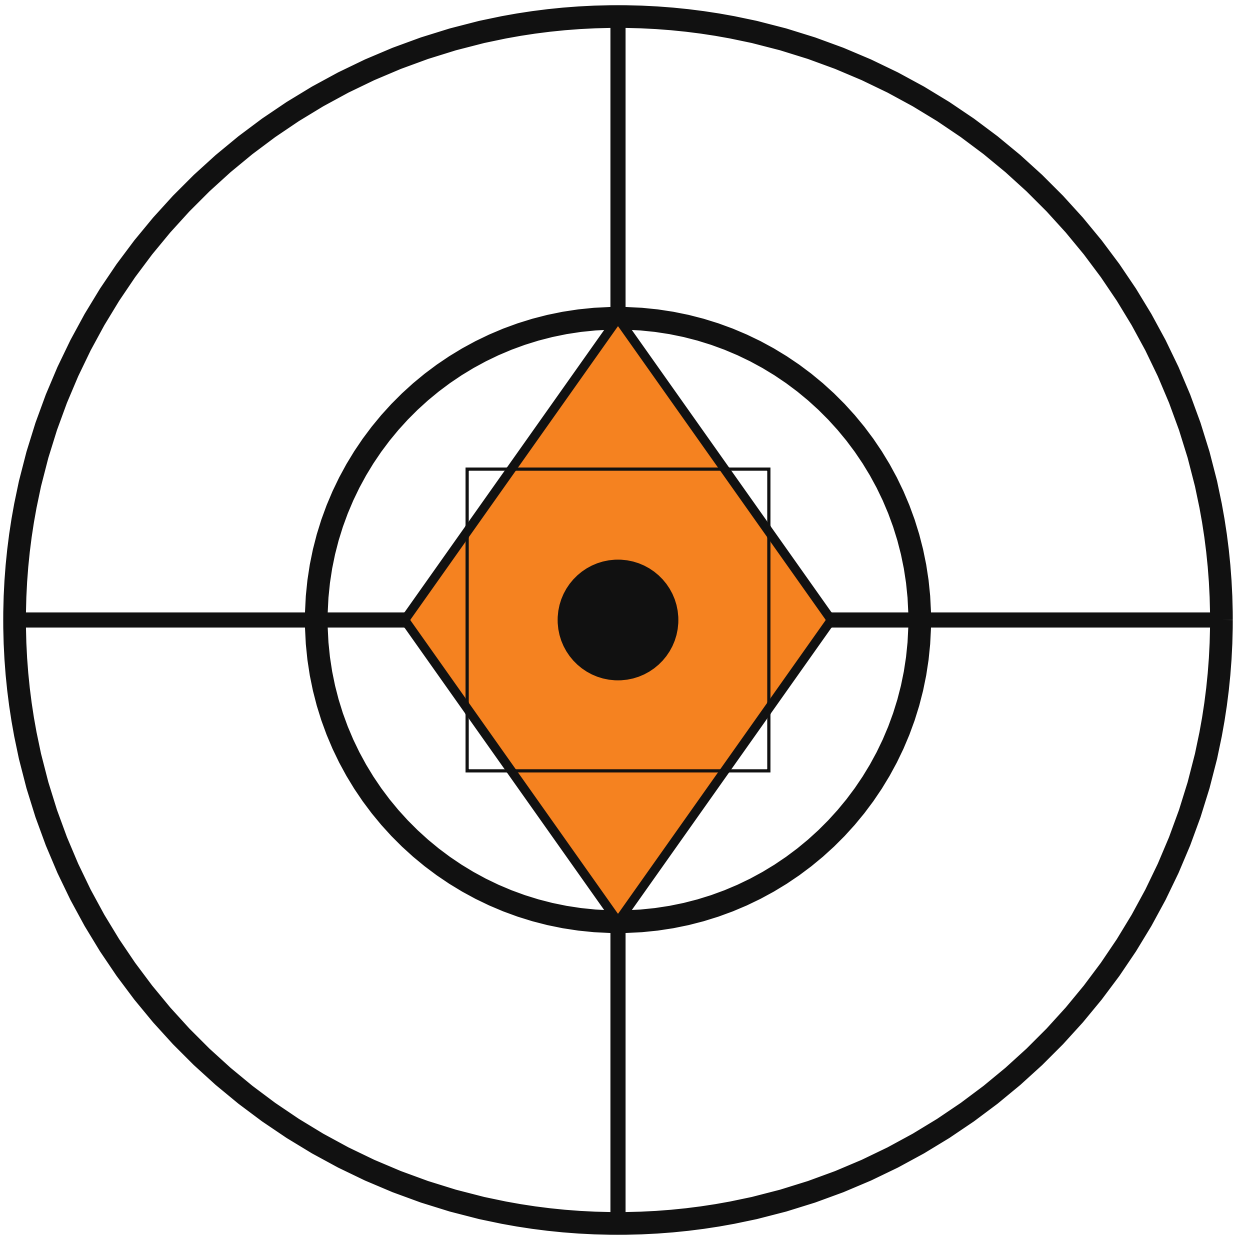

CW: _____

COL: _____

600 yd MOA Ladder / OCW

Numbered true-MOA aiming points, one per page.

TRUE MOA TARGET

600 yd / print at 100%

PRINT VALIDATION

0.5 MOA @ 600 yd = 79.80 mm



0.25 MOA = 39.90 mm



Measure with a ruler: each bar must match its length.

Rifle	Load	Start / Step	Date

Velocity	Seating depth	Conditions	Notes

Rings 0.5 / 1 MOA (79.80 / 159.59 mm), crosshair 1 MOA, diamond 0.5 MOA tall, box 0.25 MOA · aim at the centre.

6

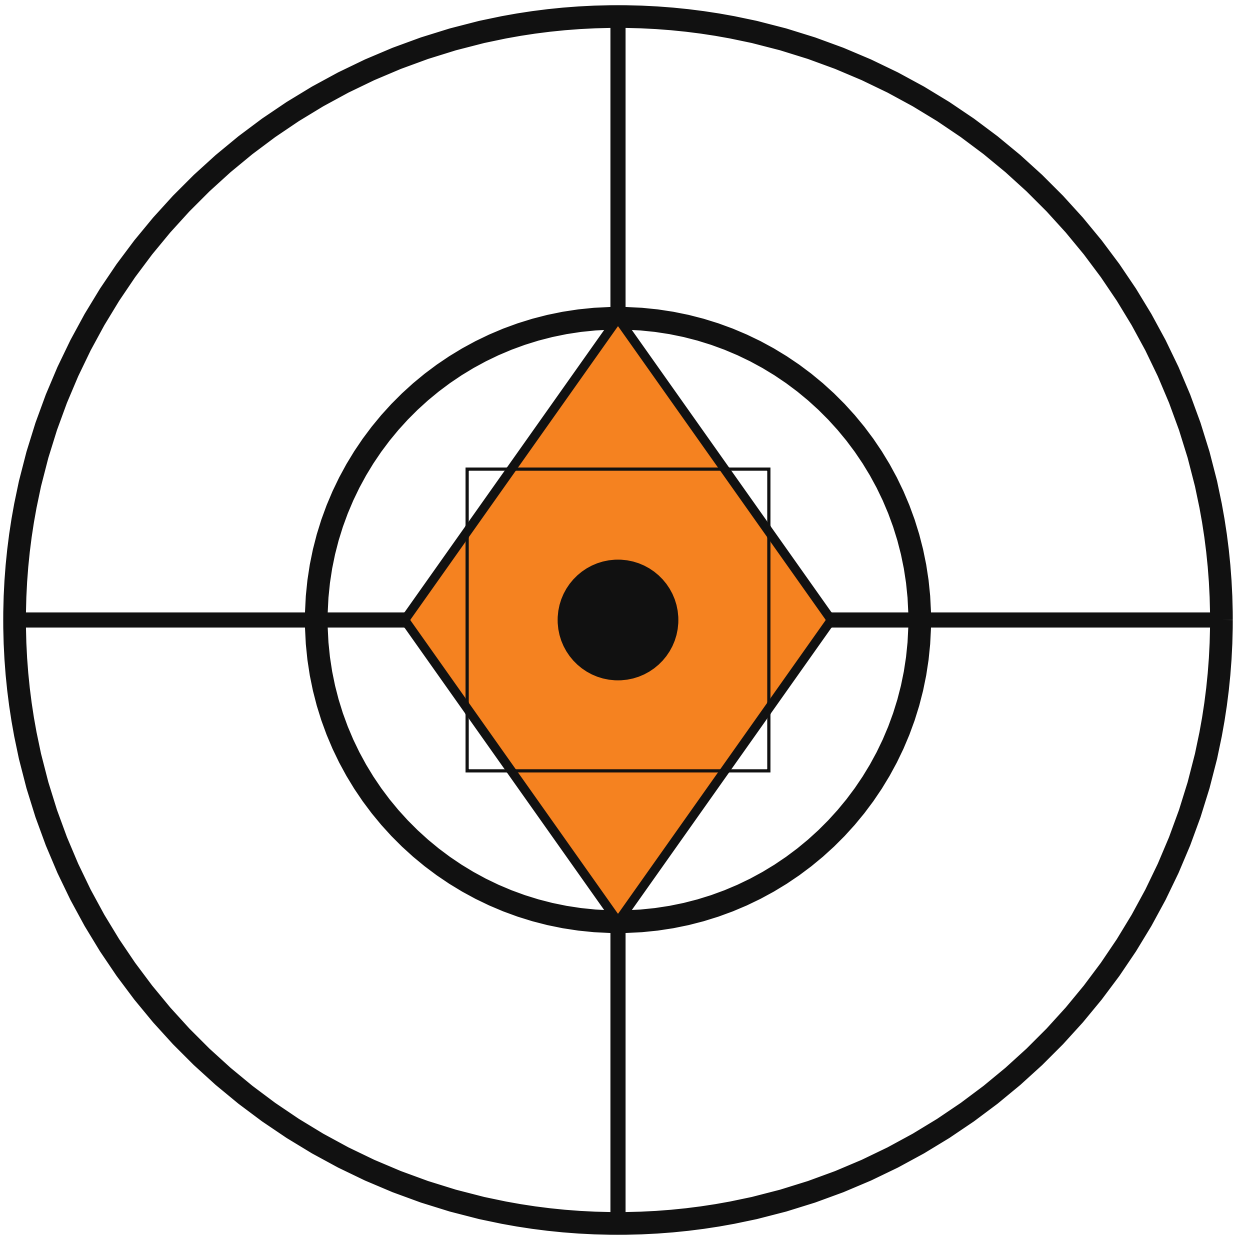

CW: _____

COL: _____

600 yd MOA Ladder / OCW

Numbered true-MOA aiming points, one per page.

TRUE MOA TARGET

600 yd / print at 100%

PRINT VALIDATION

0.5 MOA @ 600 yd = 79.80 mm



0.25 MOA = 39.90 mm



Measure with a ruler: each bar must match its length.

Rifle	Load	Start / Step	Date

Velocity	Seating depth	Conditions	Notes

Rings 0.5 / 1 MOA (79.80 / 159.59 mm), crosshair 1 MOA, diamond 0.5 MOA tall, box 0.25 MOA · aim at the centre.

7

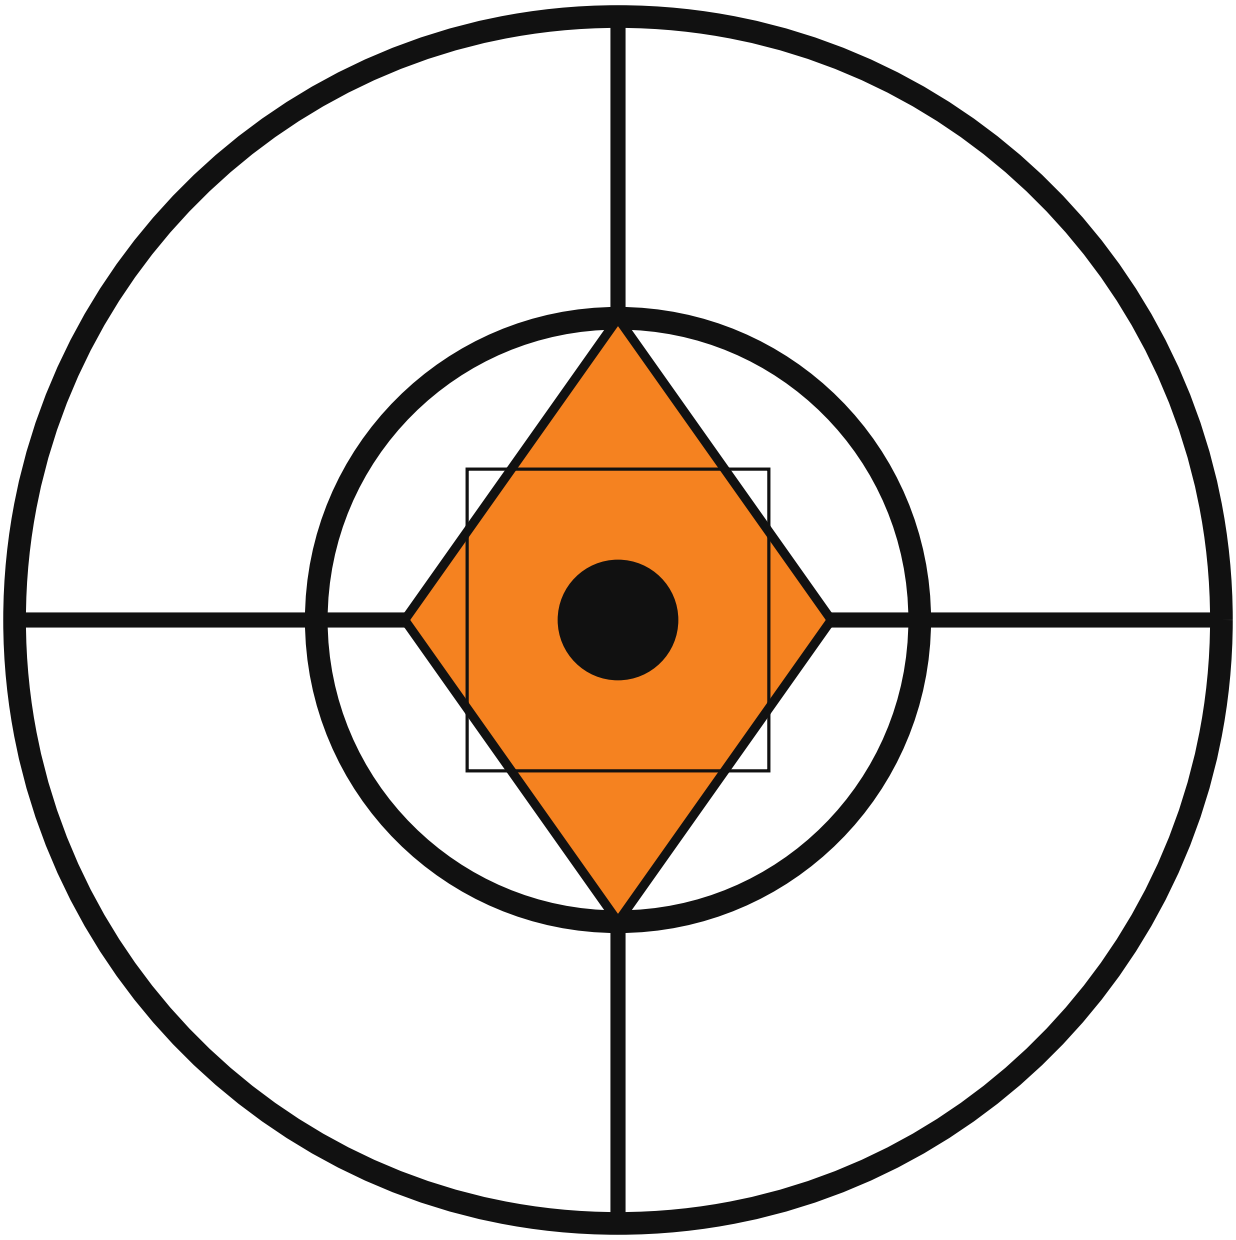

CW: _____

COL: _____

600 yd MOA Ladder / OCW

Numbered true-MOA aiming points, one per page.

TRUE MOA TARGET

600 yd / print at 100%

PRINT VALIDATION

0.5 MOA @ 600 yd = 79.80 mm



0.25 MOA = 39.90 mm



Measure with a ruler: each bar must match its length.

Rifle	Load	Start / Step	Date

Velocity	Seating depth	Conditions	Notes

Rings 0.5 / 1 MOA (79.80 / 159.59 mm), crosshair 1 MOA, diamond 0.5 MOA tall, box 0.25 MOA · aim at the centre.

8

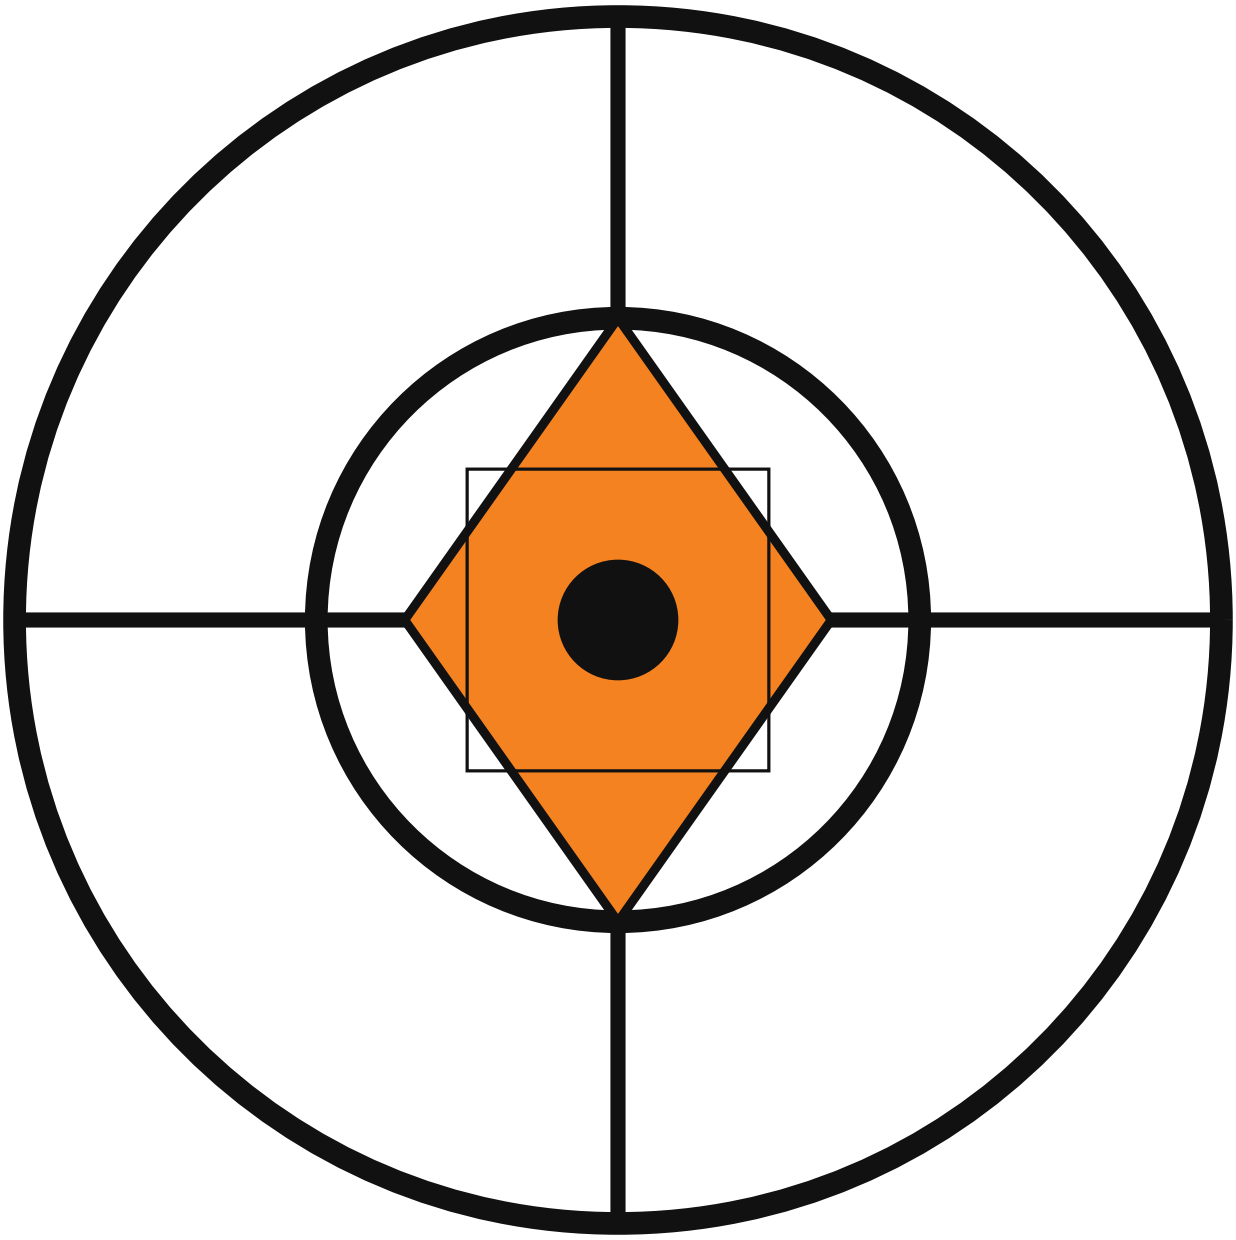

CW: _____

COL: _____

600 yd MOA Ladder / OCW

Numbered true-MOA aiming points, one per page.

TRUE MOA TARGET

600 yd / print at 100%

PRINT VALIDATION

0.5 MOA @ 600 yd = 79.80 mm



0.25 MOA = 39.90 mm



Measure with a ruler: each bar must match its length.

Rifle	Load	Start / Step	Date

Velocity	Seating depth	Conditions	Notes

Rings 0.5 / 1 MOA (79.80 / 159.59 mm), crosshair 1 MOA, diamond 0.5 MOA tall, box 0.25 MOA · aim at the centre.

9

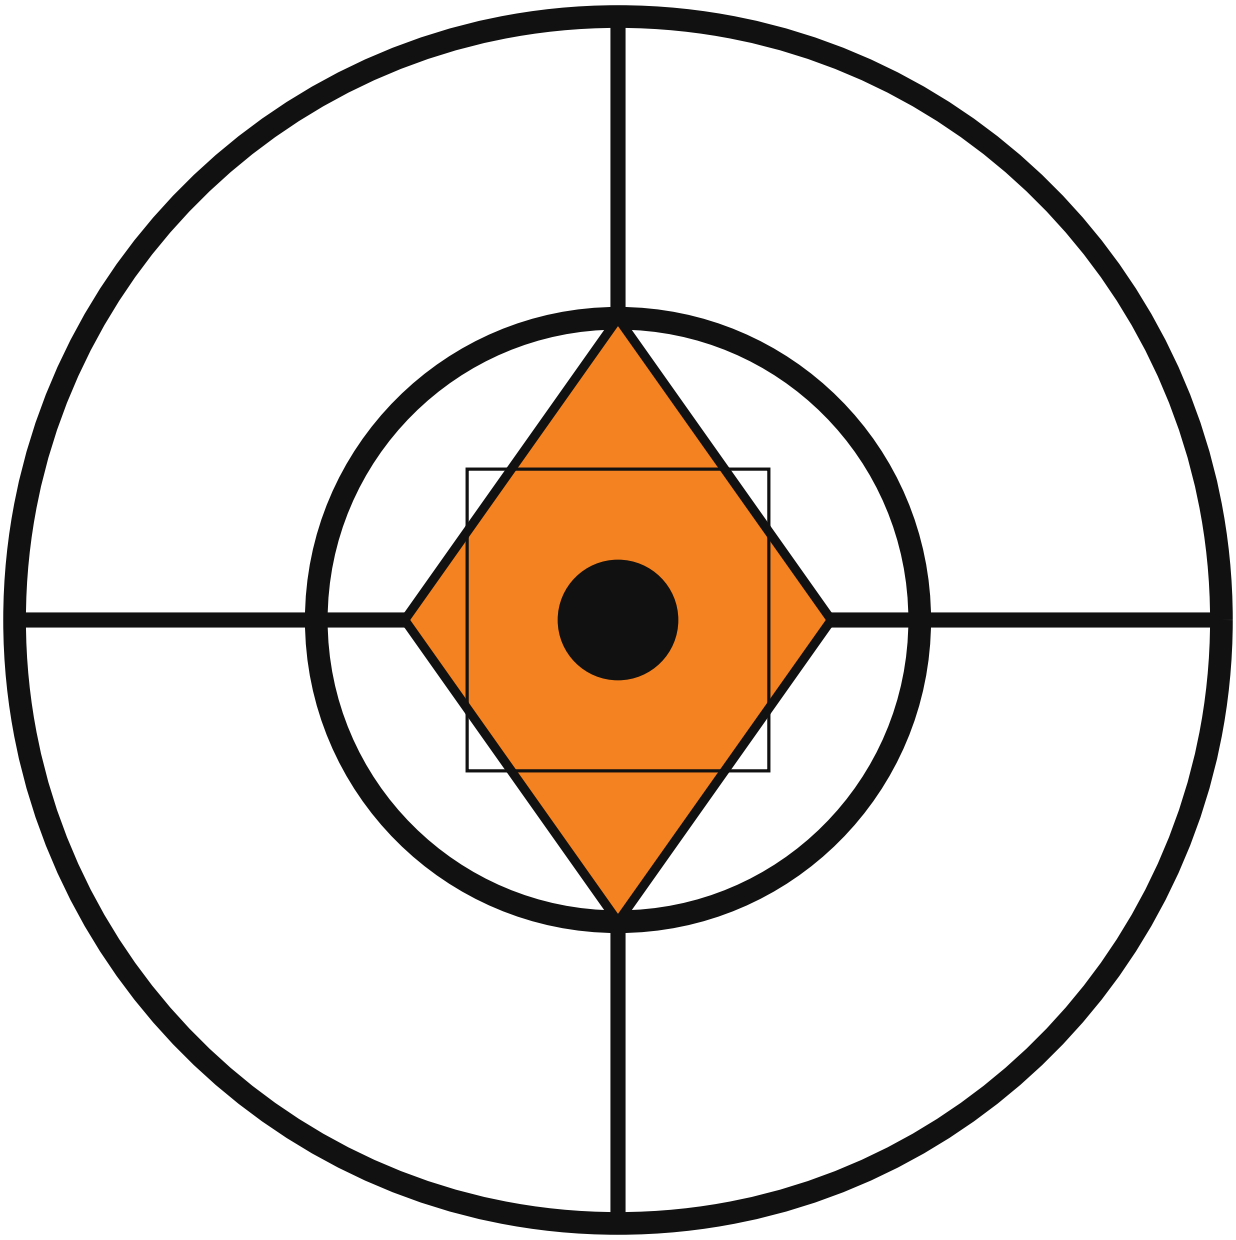

CW: _____

COL: _____

600 yd MOA Ladder / OCW

Numbered true-MOA aiming points, one per page.

TRUE MOA TARGET

600 yd / print at 100%

PRINT VALIDATION

0.5 MOA @ 600 yd = 79.80 mm



0.25 MOA = 39.90 mm



Measure with a ruler: each bar must match its length.

Rifle	Load	Start / Step	Date

Velocity	Seating depth	Conditions	Notes

Rings 0.5 / 1 MOA (79.80 / 159.59 mm), crosshair 1 MOA, diamond 0.5 MOA tall, box 0.25 MOA · aim at the centre.

10

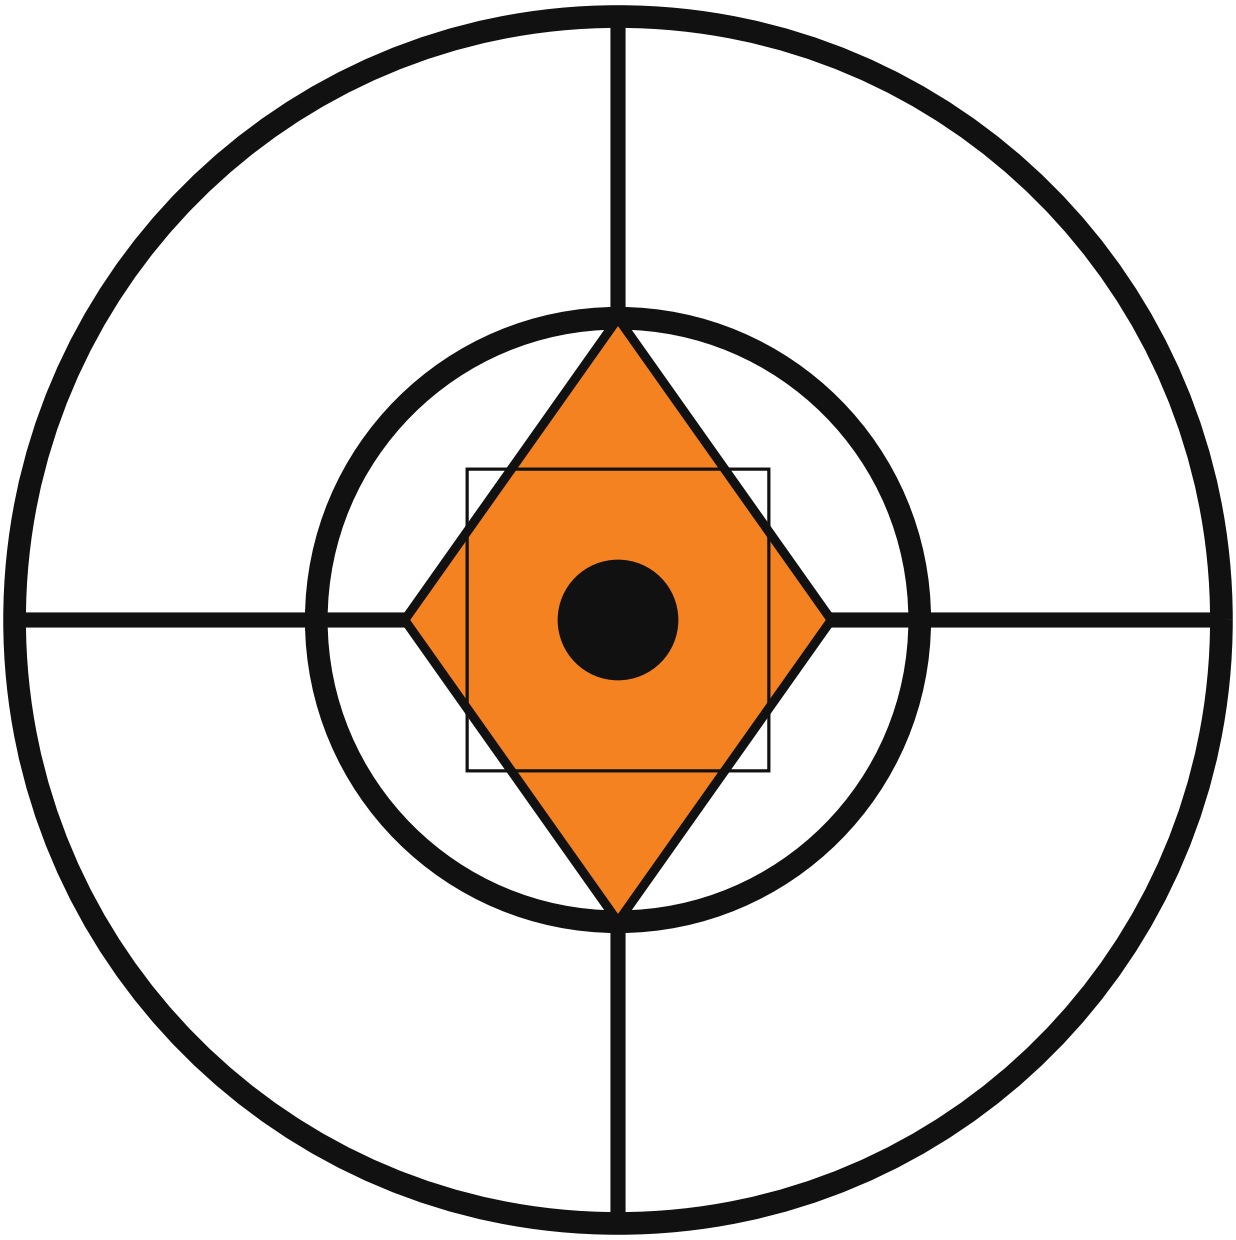

CW: _____

COL: _____

600 yd MOA Ladder / OCW

Numbered true-MOA aiming points, one per page.

TRUE MOA TARGET

600 yd / print at 100%

PRINT VALIDATION

0.5 MOA @ 600 yd = 79.80 mm

0.25 MOA = 39.90 mm

Measure with a ruler: each bar must match its length.

Rifle	Load	Start / Step	Date

Velocity	Seating depth	Conditions	Notes

Rings 0.5 / 1 MOA (79.80 / 159.59 mm), crosshair 1 MOA, diamond 0.5 MOA tall, box 0.25 MOA · aim at the centre.

11

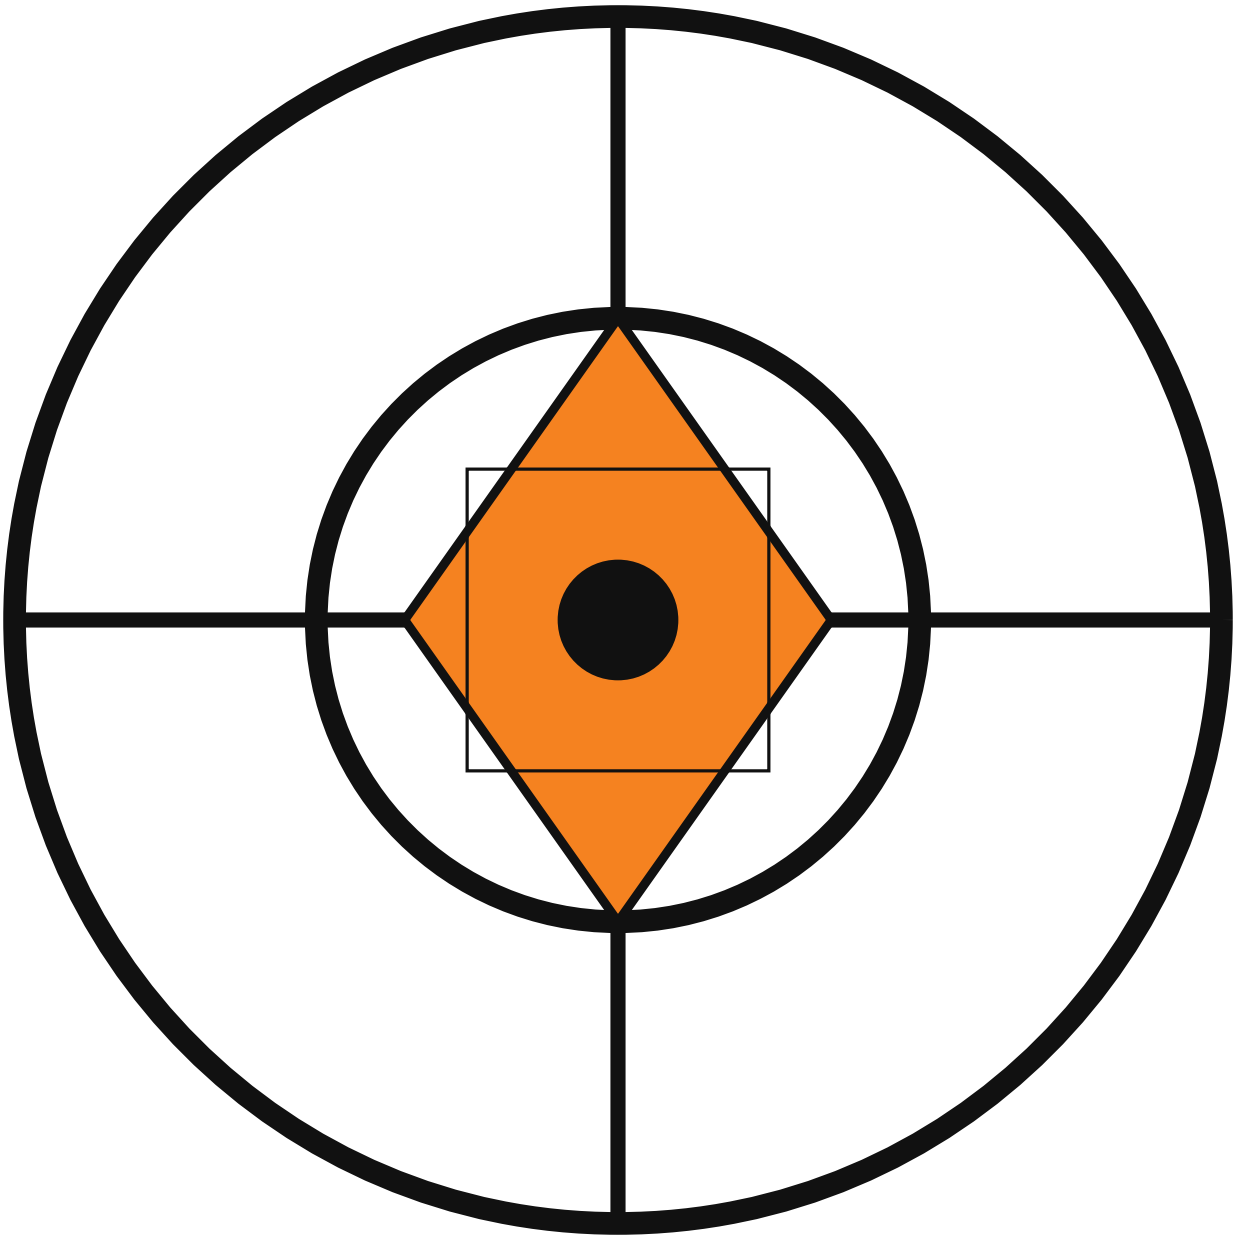

CW: _____

COL: _____

600 yd MOA Ladder / OCW

Numbered true-MOA aiming points, one per page.

TRUE MOA TARGET

600 yd / print at 100%

PRINT VALIDATION

0.5 MOA @ 600 yd = 79.80 mm

0.25 MOA = 39.90 mm

Measure with a ruler: each bar must match its length.

Rifle	Load	Start / Step	Date

Velocity	Seating depth	Conditions	Notes

Rings 0.5 / 1 MOA (79.80 / 159.59 mm), crosshair 1 MOA, diamond 0.5 MOA tall, box 0.25 MOA · aim at the centre.

12

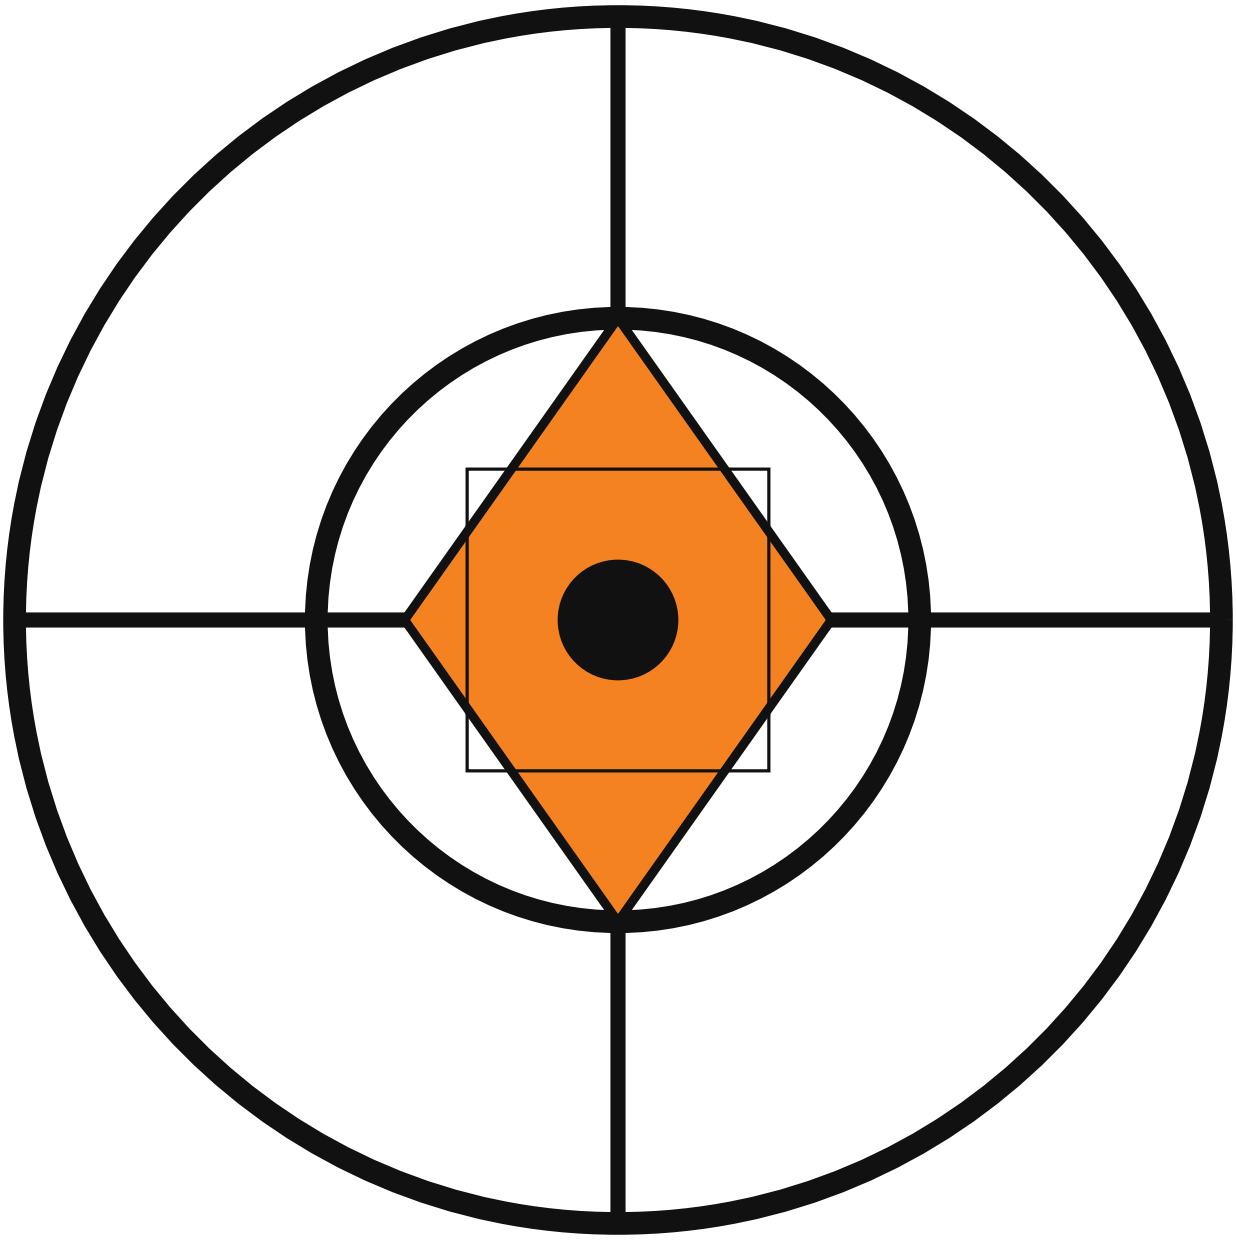

CW: _____

COL: _____